

wall panels

ART 2D

The ART 2D panel collection is a harmonious combination of 3D sculptural form and modern design. The panels are designed as a triptych - while each piece can function on its own, when placed side by side they create a composition reminiscent of wall installation.



ART 2D

wall panels

WALL PANELS PRODUCT DETAILS

Material: through-coloured MDF board / black MDF + veneer

- through-coloured MDF
- uniform colour throughout the entire cross-section
- finished with modified veneer - consistent grain and texture
- high density and dimensional stability
- CNC-machined and finished edges
- intended for indoor use

Technical parameters

- panel thickness: 12 mm/0.47 in
- panel weight: 6,5 kg
- low formaldehyde emission - E1 class
- water absorption: < 5%

Technology

- CNC milling
- manual finishing and sanding
- custom-made production
- compatible with system installation solutions

Surface finish - Hardwax Oil

- natural oils and waxes
- protection against stains and moisture
- satin, breathable surface
- local renovation possible without full sanding

Standards and compliance

- EN 71-3 - safety of toys (safe for contact with children)
- DIN 53160 - resistance to saliva and perspiration
- EN 13986 - wood-based panels approved for use in interiors


Use and care

- for indoor use only
- do not place hot objects directly on the surface
- avoid prolonged contact with water
- clean with a soft, slightly damp cloth
- do not use aggressive cleaning agents

We recommend carrying out maintenance in dry rooms every two years, and in rooms with high humidity once a year. Proper ventilation is essential to keep the panels in good condition. To refresh the surface, clean the panels with wax cleaner, and after drying, apply a thin layer of decorative wax in a suitable color.


Dimensions (mm)

600 x 900 mm / 23.23 x 23.23 in

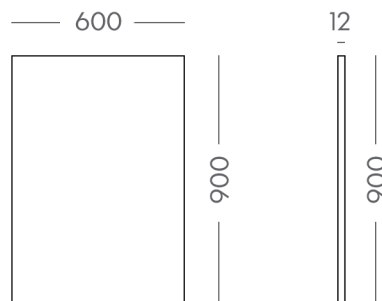

Color options

core collection*




signature collection



core collection*



signature collection

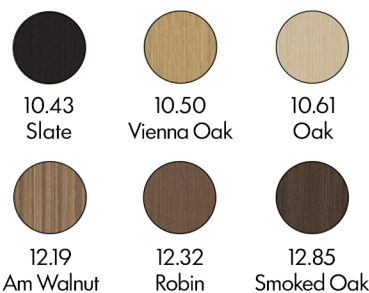

*express availability

DREWINKY
by Quatro Wood

DREWINKY

Słoneczna 9
55-330 Brzezina
+48 690 022 006
sklep@drewinky.pl
www.drewinky.eu



ART 2D

wall panels

WALL PANELS INSTALLATION INSTRUCTIONS

Installation with Mounting Adhesive

Tools and materials required:

Drewinky wall panels
mounting adhesive (e.g. TitaniumPro High Tack Fast)
adhesive gun, spirit level, spacers or support battens, utility knife

Surface preparation

The wall must be even, dry, clean, dust-free, degreased, and primed.

Marking installation lines

Mark horizontal and vertical reference lines.

Maintain a 5-10 mm expansion gap from the floor, walls, and ceiling.

Applying adhesive






Apply mounting adhesive to the back of the panel in even strips (2-4 mm thick across the entire surface).

Panel installation

Attach the first panel, press it firmly, and support it (e.g. with spacers or battens). Install subsequent panels first in the bottom row, then continue upward layer by layer.

Curing time

Leave supports in place for approximately 24 hours to allow full adhesive bonding.



Installation with Mounting Clips

Tools and materials required:

Drewinky wall panels
mounting clips (e.g. Siso-Pol Click or Fastmount)
spirit level, screwdriver or drill (depending on substrate)
mounting hardware (screws/anchors - according to the system)

Surface / substructure preparation

Panels can be installed directly onto the wall or onto a prepared substructure (wooden or metal frame).

Marking installation lines





Mark horizontal and vertical reference lines and allow a 5-10 mm expansion gap from the floor, walls, and ceiling.

Installing clips

Fix the clips according to the manufacturer's instructions.

Panel installation

Snap the panels into the installed clips, starting from the bottom row and continuing upward.



This installation method is particularly recommended for:

- lighting installation,
- running cables without wall modifications,
- easy panel removal when needed.

DREWINKY
by Quatro Wood

Śloneczna 9
55-330 Brzezina
+48 690 022 006
sklep@drewinky.pl
www.drewinky.eu

DREWINKY

