

cabinet

VIVID

A cabinet made of a mass-dyed, high-density MDF. Stands out with its geometric relief, precision-milled using CNC technology. In this design, color is not merely decorative - it serves as a tool that shapes the atmosphere of the interior.



DREWINKY

Material: through-coloured MDF

- Through-coloured MDF, 19 mm thickness
- Uniform colour throughout the entire cross-section
- High density and dimensional stability
- CNC-machined and rounded edges
- Intended for indoor use

Technical parameters

- panel thickness: 19 mm/0.75 in
- weight: 30 kg
- low formaldehyde emission - E1 class
- water absorption: < 5%

Safety standards

- EN 71-3 – safety of toys (safe for contact with children)
- DIN 53160 – resistance to saliva and perspiration
- EN 13986 – wood-based panels approved for use in building interiors

Surface finish - Hardwax Oil

- Natural oils and waxes
- Protection against stains and moisture
- Satin, breathable surface
- Local renovation possible without full sanding

Manufacturing and construction

- CNC-cut components
- Hand-finished edges
- Legs fixed to the tabletop using Lamello Cabineo connectors
- Invisible fittings, high structural stability

Delivery and assembly




- Delivered fully assembled or flat-packed for self-assembly
- Only a cordless screwdriver is required
- Special hex key included

Use and care

- For indoor use only
- Do not place hot objects directly on the surface
- Avoid prolonged contact with water
- Clean with a soft, slightly damp cloth
- Do not use aggressive cleaning agents


Dimensions (cm)

184 x 44 x 75 cm / 72.44 x 17.32 x 29.53 in

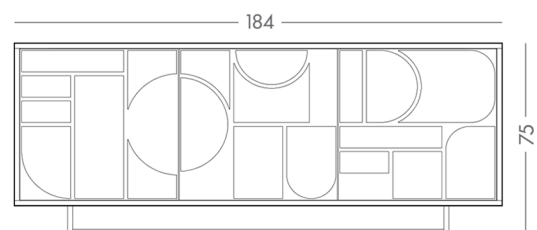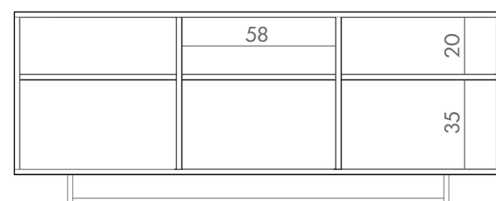

Color options

core collection*

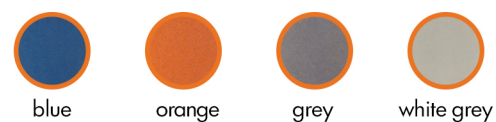

signature collection



*express availability

mix & match

choose the color of the cabinet carcass and fronts

DREWINKY
by Quatro Wood

Słoneczna 9
55-330 Brzezina
+48 690 022 006
sklep@drewinky.pl
www.drewinky.eu

DREWINKY



VIVID

cabinet

Set components:

Top panel - 1 pc/Bottom panel - 1 pc

Outer side panels - 2 pcs/Vertical dividers - 2 pcs

Horizontal shelves - 3 pcs/Back panel - 1 pc

Decorative fronts - 3 pcs

Legs - 2 pcs

Bottom crossbar - 1 pc

Lamello Cabineo connectors and screws - included in the set

Cover caps

Required tools

Drill/driver or screwdriver

Special drill bit - included in the set

Soft protective pad to protect the elements during assembly

Installing the Cabineo connectors

Insert the Lamello Cabineo connectors into the prepared CNC-milled slots in the cabinet elements. The screw opening should face the element being connected. If necessary, gently press the connector by hand to ensure it is properly seated in the slot.

Installing the back panel

Slide the back panel into the rear part of the cabinet body according to the prepared groove.

Installing the top panel

Place the top panel onto the prepared cabinet body with the back panel already inserted, aligning the mounting holes with the previously installed connectors. Tighten the connections gradually and evenly on both sides of the cabinet.

Installing the shelves

Place the horizontal shelves between the dividers according to the prepared mounting holes. Once all elements are aligned, tighten the connectors evenly until the structure becomes stable.

Installing the decorative fronts

Attach the hinges to the decorative fronts. Then mount the fronts onto the front part of the cabinet according to the pattern layout and screw them into the prepared mounting holes. Before fully tightening, check that the gaps are even and the elements are properly aligned.

Stability check

After completing the assembly, check the stability of the cabinet and ensure that all connections are secure. If necessary, retighten selected elements.


Installing the cover caps

Place the cover caps into the visible openings of the Cabineo connectors.

Technical notes

Do not use excessive force when tightening. The recommended tightening torque is approximately 2–3 Nm. Assembly is best carried out on a soft and level surface. When moving the cabinet, it should be lifted by two people.

CABINET INSTALLATION INSTRUCTIONS

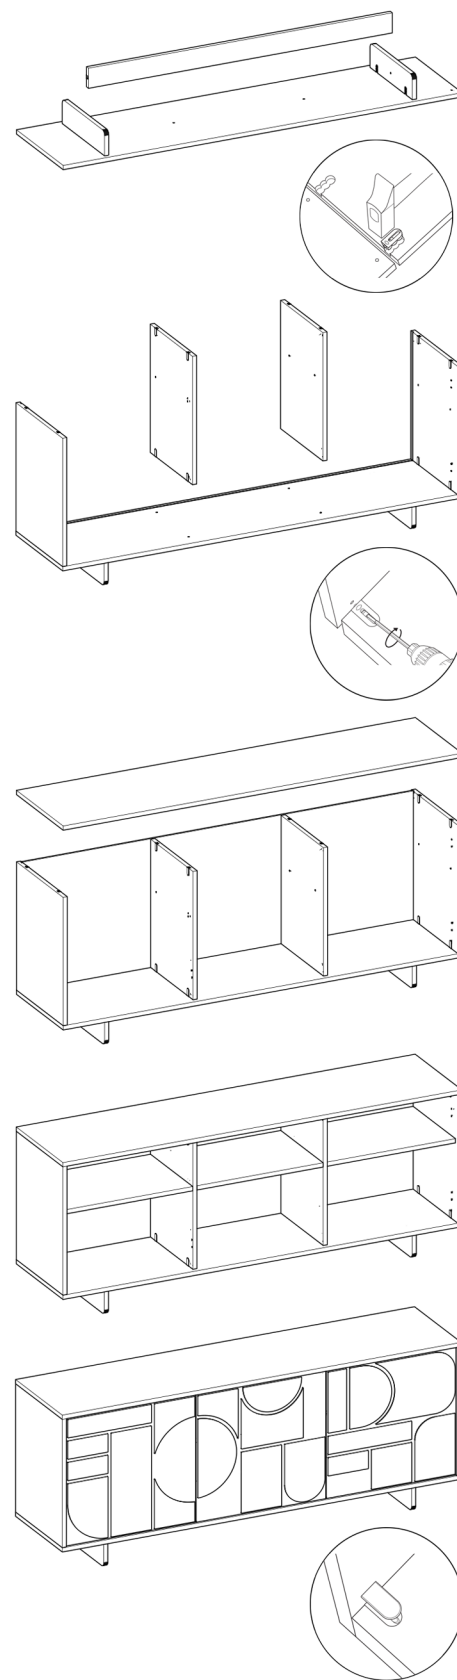

DREWINKY
by Quatro Wood

DREWINKY

Śloneczna 9
55-330 Brzezina
+48 690 022 006
sklep@drewinky.pl
www.drewinky.eu

